
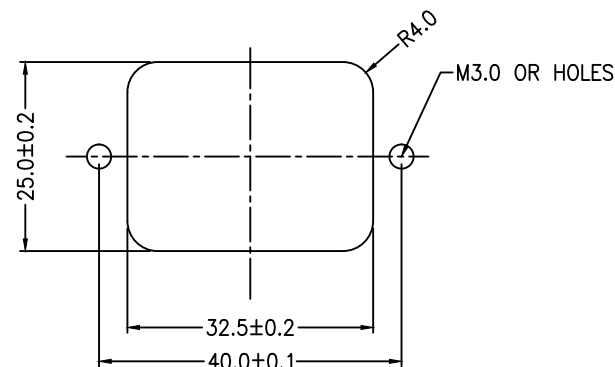
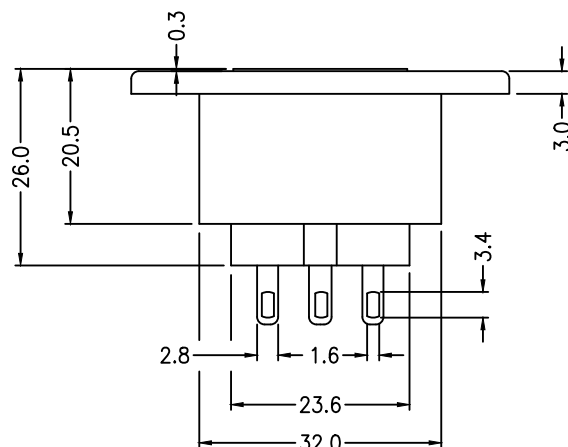
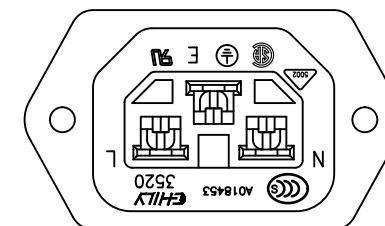
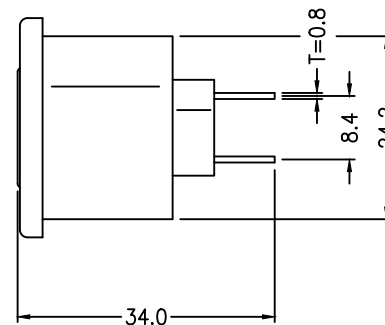


CUSTOMER	DB003	FILE NO.	D03-035	THIS DRAWING AND SPECIFICATIONS, HEREIN ARE THE CONFIDENTIAL PROPERTY OF SAMAR AND SHALL NOT BE REPRODUCED OR COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION.	REV.	DESCRIPTION	DRAWN / DATE	APPROVED / DATE
					0	INITIAL RELEASE	FROS 03/30/2011	FROS 03/30/2011

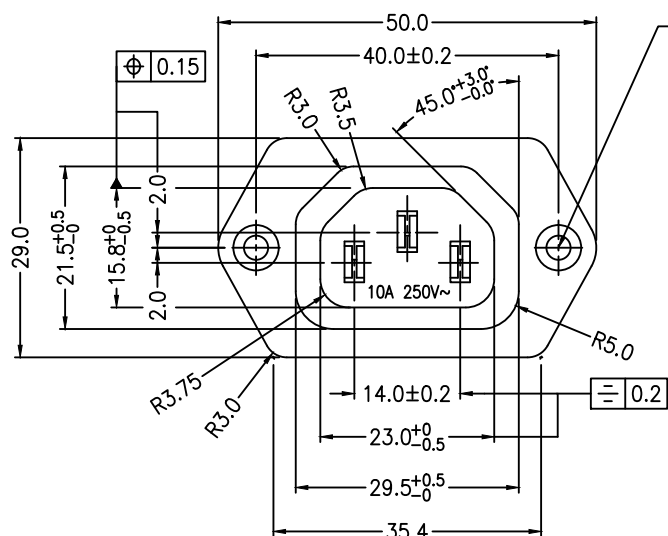

PANEL CUT-OUT

UL NO : E87666(S)
CSA NO : LR55160
VDE NO : 40017241
CB NO : DE1 34404

1. RATING: 10A 250VAC (UL,CSA)
10A 250V~ (VDE)
2. HOUSING MATERIAL: THERMOPLASTIC, UL94V-0
3. DIELECTRIC STRENGTH: MUST WITHSTAND 2000V RMS 50 OR 60Hz
FOR 1 MINUTE BETWEEN EACH TERMINAL.

RoHS

DIMENSIONS ARE IN mm [INCH]	TOLERANCES ARE FRACTIONS DECIMALS ANGLES	MATERIAL	P/N	088294	DRAWN	FROS	DATE	03/30/2011
MOLD NO.	.x ±0.5 [0.020] .xx ±0.3 [0.012]	FINISH	PROJECT NO.					
D03-035		COLOR	SCALE	1.6:1	SIZE	A4	SHEET	1 OF 1



THREE PRONG POWER JACK